


Spicer® Compact™ Series Plus Driveshaft

For trucks and buses from 8-60 tonnes.



SPICER®

Drivetrain Products

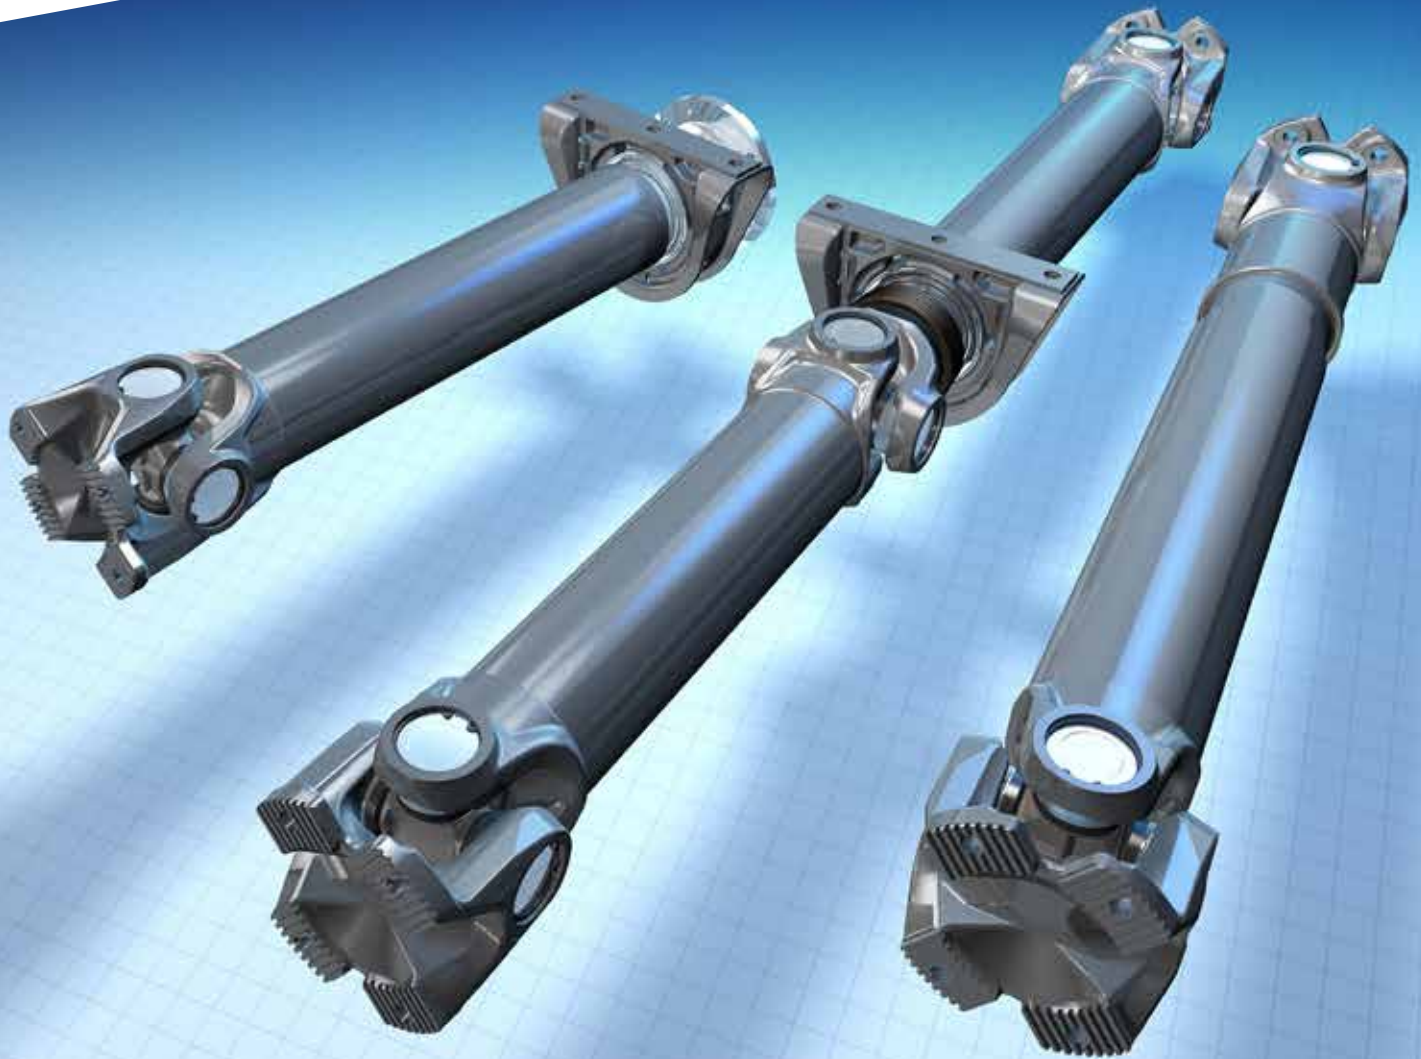

Engineered to reduce weight and extend life.

Designed to help commercial vehicles meet increasingly stringent global environmental regulations, this next-generation technology offers innovative engineering advancements that reduce weight by up to 10 percent and increase the life of the driveshaft by as much as 25 percent.

Spicer® Compact™ Series Plus Driveshaft

For trucks and buses from 8-60 tonnes.

INCREASED SPLINE DIAMETER


Reduces axial sliding forces.

REINFORCED BEARING SEAL

Provides greater resistance against environmental contaminants and improves bearing life by up to 25%.

PROPRIETARY FRICTION WELD

Reduces driveshaft weight.

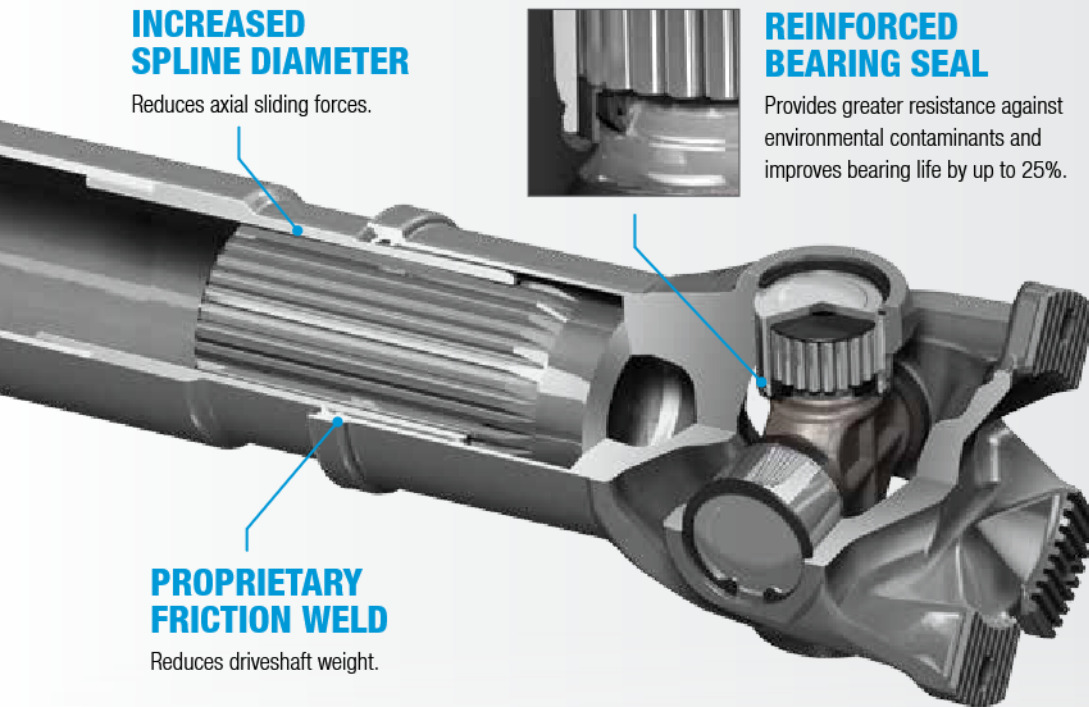

Superior vehicle efficiency, performance, and reliability

In addition to significant weight savings, Spicer® Compact™ Series Plus, the lightest steel driveshaft in its class, also enhances vehicle performance, offers extended product life, increases part durability, and improves sealing performance. A variety of new and existing processes are used to design and manufacture this family of driveshafts, creating an optimized system, unlike other products currently available in the market.

Product features include:

- Upgraded sealing package for 25% greater durability
- Lightweight slip member reduces sliding force for improved noise, vibration, and harshness (NVH) and less component wear
- Advanced tubing design engineered with high strength material for reduced weight
- Optimized center bearing design with wider support ring and more reliable labyrinth seal for superior performance and reliability

Specifications	Spicer® Compact™ Series Plus Driveshaft					
	2040	2045	2047	2055	2060	2065
Functional Limit Torque (KNm)	14	17	19	25	30	35
Connection	XS 150	XS 180	XS 180	XS 180	XS 180	XS 180
Optional	XS 180	XS 150	XS 150	—	—	—
Flange-ø (mm)	155	180	180	180	180	180
Max. Joint Angle (°)	27 44	27 44	27	27	30	27
Max. Rotation-ø (mm)	160	174	174	178	196	206
Standout (mm)	82 102	87 108	87	92	100	105
Compressed Length (mm)	550 695	582 730	582	619	641	677
Sliding Movement (mm)	110 180	110 180	110	110	110	110
Tube (mm)	119, 4x2, 7 99, 2x4, 1	118, 8x3, 4 108, 2x4, 1	118, 2x4, 1	118, 4x5, 2	128, 4x5, 2	140, 2x5, 1
Weight of 1m-Shaft (kg)	29.21 33.68	35.36 40.92	36.24	44.25	50.55	62.72
Weight of 1m-Tube (kg)	7.77 9.62	9.68 10.53	11.54	14.52	15.8	16.99



Increase the performance of your commercial vehicle and reduce driveline weight with the Spicer® Compact™ Series Plus driveshaft.

To learn more visit dana.com/cv

Dana Commercial Vehicle Driveline Technologies
3939 Technology Drive
Maumee, Ohio, USA 43537
dana.com



SPICER®
Drivetrain Products

Application Policy

Capacity ratings, features, and specifications vary depending upon the model and type of service. Application approvals must be obtained from Dana; contact your representative for application approval. We reserve the right to change or modify our product specifications, configurations, or dimensions at any time without notice.